


350 BAR REMOTE TPRD MIDDLE PLUG WITH TEMPERATURE PRESSURE RELIEF DEVICES



DESCRIPTION

Nominal working pressure: 350 bar
 Temperature range: -40°C / +85°C
 TPRD activation (glass bulb): 110°C
 or 102,7°C (± 5°C)
 Body material: AISI 316L
 Weight: 1050 g

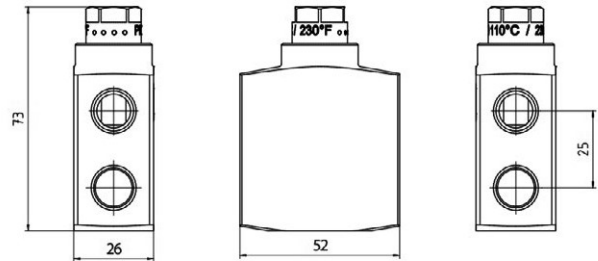

350 BAR

MIDDLE PLUG 350 bar

Art. / Code	Homologation	Inlet	Outlet	TPRD	TPRD vent hole
87088815F	EC79	2x 3/4"-16 UNF 2B	2x 3/4"-16 UNF 2B	110°C	ø4
87288125F	EC79	7/16"-20 UNF 2B	7/16"-20 UNF 2B	110°C	ø4
87288390	EC79	9/16"-18 UNF 2B	9/16"-18 UNF 2B	110°C	ø4

Applications



Certification
 EC79, R134, HPRD1, EU535

