

DEI

VALVES STOCKIST

STOCK DE VÁLVULAS INDUSTRIALES



LEXIER



Distribuidor en España

Tel: +34 93 171 31 01

lexier@lexier.es

www.lexier.es

En el grupo D.E.I. disponemos de un amplio stock de válvulas industriales de primeras marcas a nivel mundial. Están disponibles en distintos diseños, tamaños, presiones y materiales.

Somos un equipo dinámico y comprometido con un servicio ágil y de entrega rápida.

Nuestro equipo técnico y comercial está a su disposición para asesorar y resolver rápidamente cualquier consulta.

Somos su opción ideal cuando requiere de una válvula industrial de alta calidad a un plazo rápido y con un precio competitivo.




Amplio stock (más de 100.000 unidades) en válvulas forjadas y de fundición en distintos diseños y materiales:

- ✓ Válvula de globo
- ✓ Válvula de compuerta
- ✓ Válvula de retención clapeta
- ✓ Válvula de retención pistón
- ✓ Válvula de fuelle
- ✓ Válvula de bola
- ✓ Válvula para servicio en baja temperatura
- ✓ Válvula para servicio criogénico
- ✓ Válvulas API 6A

Materiales disponibles en stock:


- ✓ A105, LF2
- ✓ F316/316L, F304
- ✓ F5, F9, F11, F22, F44, F51, F53, F55, F91
- ✓ AISI 321, AISI 347
- ✓ Monel K500, Inconel 625, Inconel 825, A20

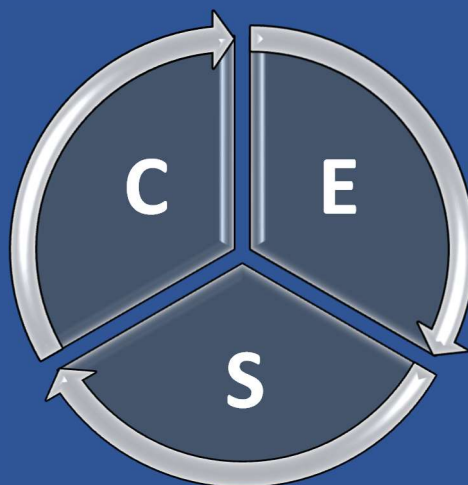

Calidad / Experiencia / Servicio


GATE VALVES

GATE VALVE - Bolted Bonnet - Full & Standard Port
ANSI Class: 800 / 1500 - Sizes: ½" - 2"

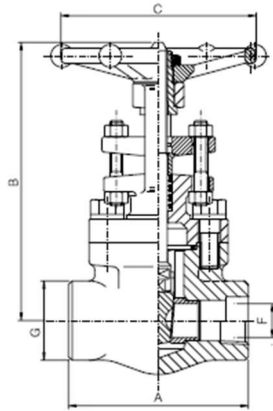


FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 602 - ASME B16.34 - BS 5352
FACE TO FACE	ANSI B16.10
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD ENDS	ANSI B16.11
SCREWED NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

GATE VALVE - Welded Bonnet - Full & Standard Port
ANSI Class: 800 / 1500 - Sizes: ½" - 2"

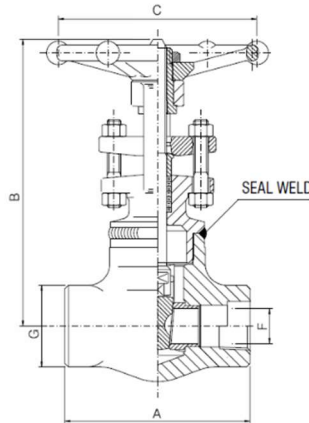

FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 602 - ASME B16.34 - BS 5352
BODY BONNET WELD	ASME IX
FACE TO FACE	ANSI B16.10
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD ENDS	ANSI B16.11
SCREWED NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

GATE VALVE - Bolted Bonnet - Full Port
ANSI Class: 1500 / 2500 - Sizes: ½" - 2"

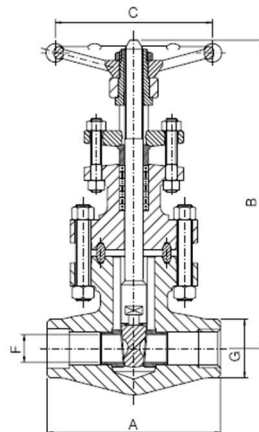


FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	ASME B16.34 - BS 5352
FACE TO FACE	ANSI B16.10
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD ENDS	ANSI B16.11
SCREWED NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

Válvulas en materiales: A105, LF2, F5, F9, F11, F304, F316, F316L, F51, F55, F44, F347, F91, F321, A20, INCOLOY 825, K500 (disponibilidad a consultar)


GATE VALVES

GATE VALVE - Welded Bonnet - Full & Standard Port
ANSI Class: 2500 / 4500 - Sizes: ½" - 2"

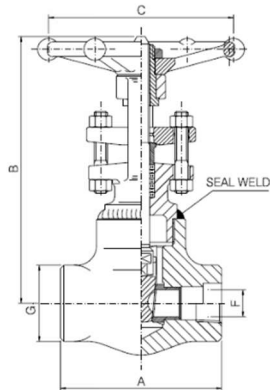

FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
WELDED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 600 / API 602
FACE TO FACE	ANSI B16.10
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD	ANSI B16.11
NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

GATE VALVE - Bolted Bonnet - Full & Standard Port
ANSI Class: 150 / 300 / 600 / 800 / 1500

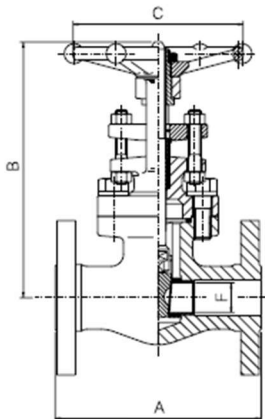


FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED & WELDED BONNET	
RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	B16.34 - BS 5352
FACE TO FACE	ANSI B16.10
FLANGE FACE	ANSI B16.5
PRESSURE TEST	API 598

Válvulas en materiales: A105, LF2, F5, F9, F11, F304, F316, F316L, F51, F55, F44, F347, F91, F321, A20, INCOLOY 825, K500 (disponibilidad a consultar)


GLOBE VALVES

GLOBE VALVE - Bolted Bonnet - Full & Standard Port
ANSI Class: 800 / 1500 - Sizes: ½" - 2"

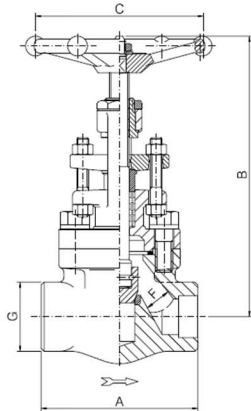


FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	ASME B16.34 - BS 5352
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD ENDS	ANSI B16.11
SCREWED NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

GLOBE VALVE - Welded Bonnet - Full & Standard Port
ANSI Class: 800 / 1500 - Sizes: ½" - 2"

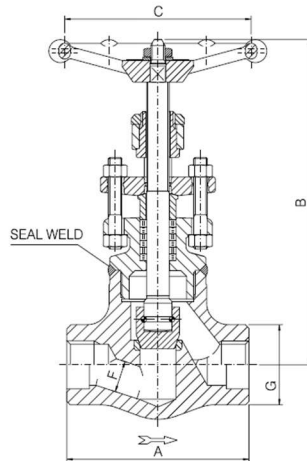

FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
WELDED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	ASME B16.34 - BS 5352
BODY BONNET WELD	ASME IX
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD ENDS	ANSI B16.11
SCREWED NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598


GLOBE VALVE - Bolted Bonnet - Full Port
ANSI Class: 1500 / 2500 - Sizes: ½" - 2"

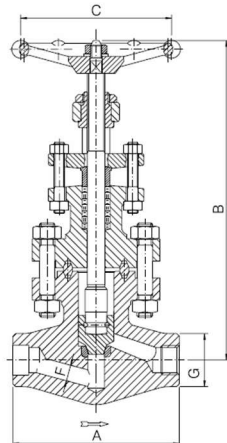

FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	ASME B16.34 - BS 5352
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD ENDS	ANSI B16.11
SCREWED NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

Válvulas en materiales: A105, LF2, F5, F9, F11, F304, F316, F316L, F51, F55, F44, F347, F91, F321, A20, INCOLOY 825, K500 (disponibilidad a consultar)

GATE VALVE - Welded Bonnet - Full & Standard Port
ANSI Class: 2500 / 4500 - Sizes: ½" - 2"

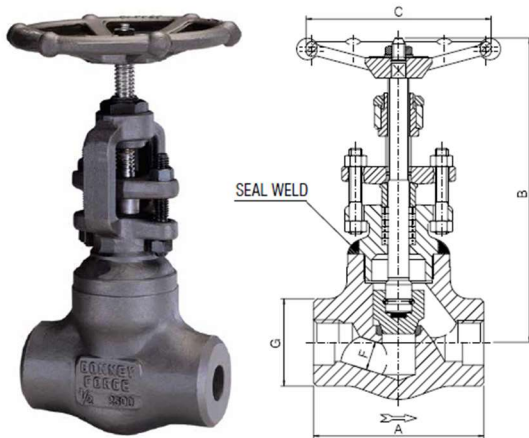


FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
WELDED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	ASME B16.34
BODY BONNET	ASME IX
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD	ANSI B16.11
NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

GLOBE VALVE - Welded Bonnet, Full Port (Y TYPE)
ANSI Class: 800 / 1690 - Sizes: ½" - 2"



FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
WELDED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	ASME B16.34
BODY BONNET WELD	ASME IX
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD	ANSI B16.11
NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

GLOBE VALVE - Bolted Bonnet - Full & Standard Port
ANSI Class: 150 / 300 / 600 / 800 / 1500

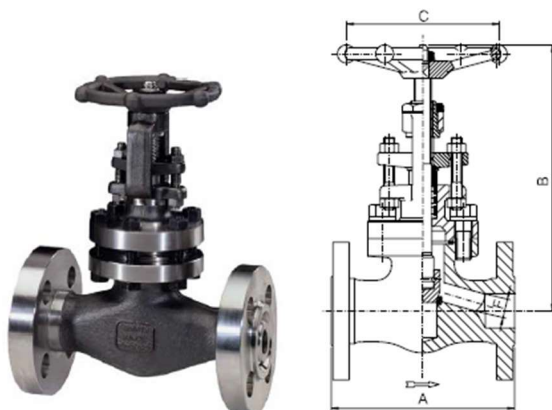


FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED & WELDED BONNET	
RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	B16.34 - BS 5352
FACE TO FACE	ANSI B16.10
FLANGE FACE	ANSI B16.5
PRESSURE TEST	API 598

Válvulas en materiales: A105, LF2, F5, F9, F11, F304, F316, F316L, F51, F55, F44, F347, F91, F321, A20, INCOLOY 825, K500 (disponibilidad a consultar)


CHECK VALVES

CHECK VALVE - Bolted Bonnet - Full & Standard Port
ANSI Class: 800 / 1500 - Sizes: 1/2" - 2"

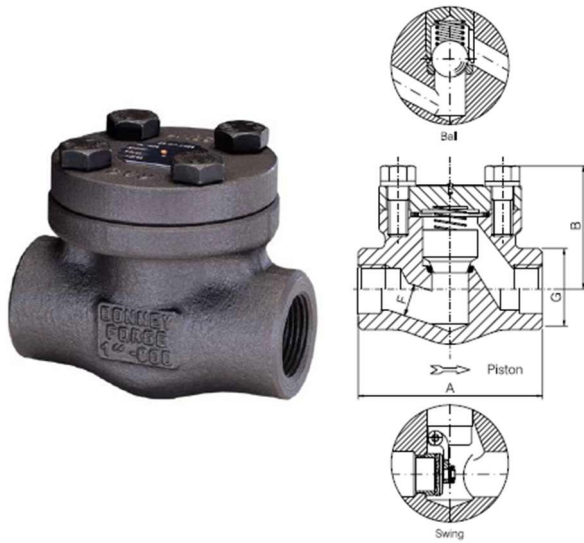


FEATURES & STANDARDS	
BOLTED BONNET COVER	
HORIZONTAL INSTALLATION (CHECK)	
HORIZONTAL OR VERTICAL INSTALLATION (PISTON)	
DESIGN STANDARDS	ASME B16.34
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD	ANSI B16.11
NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

CHECK VALVE - Bolted Bonnet - Full & Standard Port
ANSI Class: 1500 / 2500 - Sizes: 1/2" - 2"

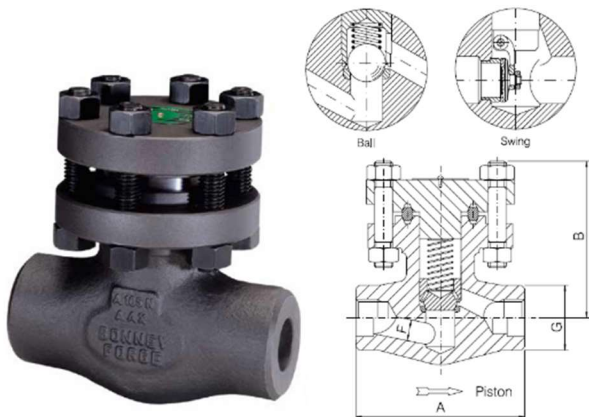

FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	ASME B16.34 - BS 5352
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD ENDS	ANSI B16.11
SCREWED NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

PISTON CHECK VALVES- Welded Bonnet - Full Bore
ANSI Class: 4500 - Sizes: 1/2" - 2"

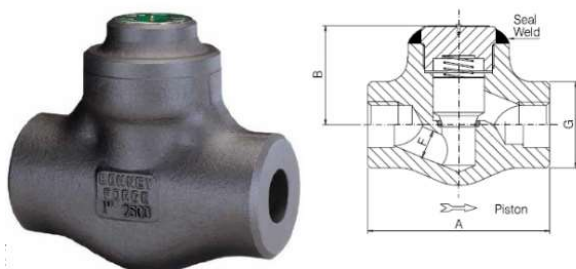


FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	ASME B16.34 - BS 5352
BODY BONNET WELD	ASME IX
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD ENDS	ANSI B16.11
SCREWED NPT ENDS	ANSI B1.20.1
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

Válvulas en materiales: A105, LF2, F5, F9, F11, F304, F316, F316L, F51, F55, F44, F347, F91, F321, A20, INCOLOY 825, K500 (disponibilidad a consultar)


BELLOWS SEALED

GAST VALVE - BELLOW SEALED - Bolted Bonnet - Full & Standard Port
ANSI Class: 150 / 300 / 800 / 1500 - Sizes: ½" - 2"

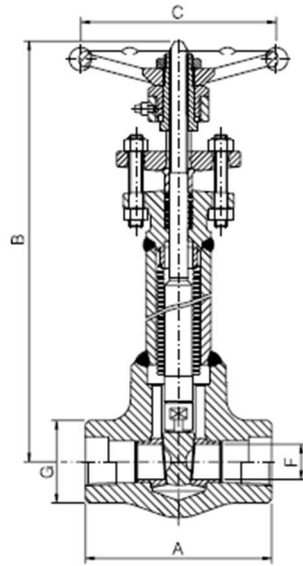

FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED & WELDED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 602, ASME B16.34, MSS-SP-117, BS 5352
BODY BONNET WELD	ASME IX
FLANGE FACE	ANSI B16.5
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD	ANSI B16.11
NPT ENDS	B1.20.1
PRESSURE TEST	API 598


GLOBE VALVE - BELLOW SEALED - Bolted Bonnet - Full & Standard Port
ANSI Class: 150 / 300 / 800 / 1500 - Sizes: ½" - 2"

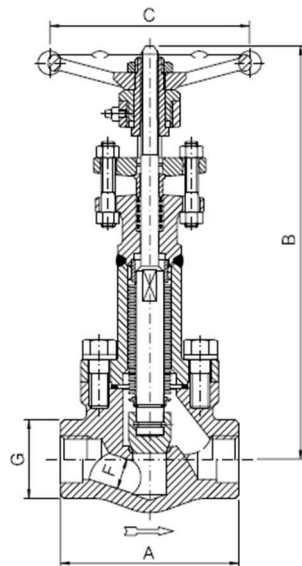

FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED & WELDED BONNET	
NON-RISING HANDWHEEL - RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 602, ASME B16.34, MSS-SP-117, BS 5352
BODY BONNET WELD	ASME IX
FLANGE FACE	ANSI B16.5
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD	ANSI B16.11
NPT ENDS	B1.20.1
PRESSURE TEST	API 598


Válvulas en materiales: A105, LF2, F5, F9, F11, F304, F316, F316L, F51, F55, F44, F347, F91, F321, A20, INCOLOY 825, K500 (disponibilidad a consultar)

CRYOGENIC GATE VALVE – Bolted Bonnet – Full & Standard Port
ANSI Class: 800

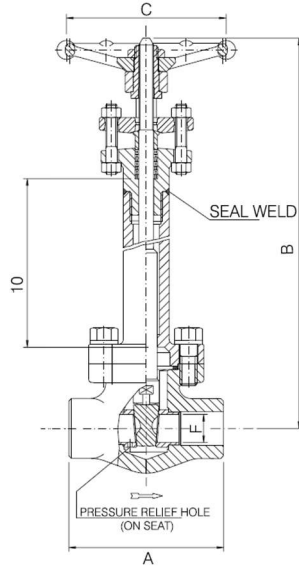

FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
NON-RISING HANDWHEEL & RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 602- ASME B16.34 BS 5352- BS 6364
BODY BONNET WELDED	AVAILABLE
FLANGE FACE	ANSI B16.5
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD	ANSI B16.11
NPT ENDS	B1.20.1
PRESSURE TEST	API 598


CRYOGENIC GLOBE VALVE – Bolted Bonnet – Full & Standard Port
ANSI Class: 800

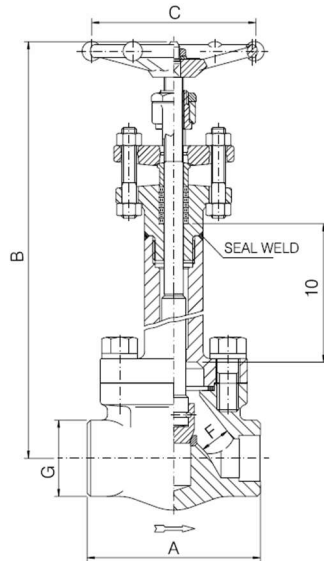

FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
NON-RISING HANDWHEEL & RISING STEM	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 602- ASME B16.34 BS 5352- BS 6364
BODY BONNET WELDED	AVAILABLE
FLANGE FACE	ANSI B16.5
BUTT WELD ENDS	ANSI B16.25
SOCKET WELD	ANSI B16.11
NPT ENDS	B1.20.1
PRESSURE TEST	API 598

BALL VALVE Split body floating type

ANSI Class: 150 / 300 / 600 / 800 / 1500

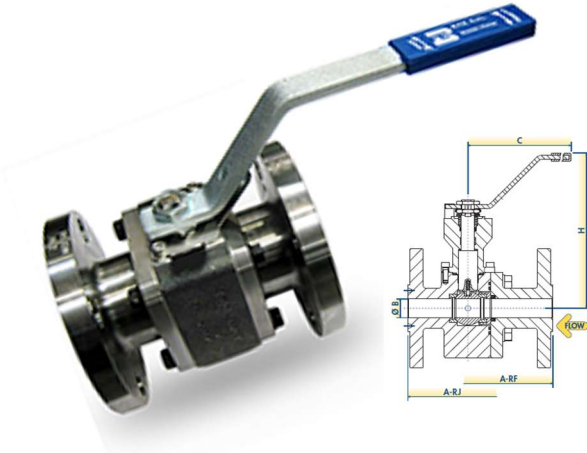

FEATURES & STANDARDS	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	ISO 17292 - API 608 - ASME B16.34
FACE TO FACE	ASME B16.10
MARKING	MSS SP-25
FLANGE END DESIGN	ANSI B16.5
PRESSURE TEST	API 598 - BS 6755 part 1
RATED PRESSURE CLASS	ASME B16.34 EN 12516-1/-2.
FUGITIVE EMISSION	ISO 15848

- Live Loaded Stem Seal.
- Phosphate coated carbon steel valve body/closure.
- ISO 5211 mounting integrated in the forged body.
- Anti-static Device.
- Blow-out Proof stem.
- Fire-Safe.
- Cavity Pressure relief seat design.
- Standard O-Rings in Viton with AED properties.

VÁLVULA FUNDICIÓN

GATE / GLOBE / CHECK / BALL - BRONZE, ALU/BRONZE, ALU/BRONZE - MONEL

Class 150 / 200 / 300 - S.150 S.200 S.300 - PN25 PN40



BALL VALVE THREADED (Fig.460 470) - B62	
DESIGN STANDARDS	BS 5154
WORKING PRESSURE	PN 16/40
MARKING	MSS SP-110
END DESIGN NPT/BSP	ANSI B1.20.1 / ISO-228/1

BALL VALVE THREADED (Fig. 470/471) - B62	
DESIGN STANDARDS	API STD 6FA / ISO 17292
BORE	REDUCED / FULL
WORKING PRESSURE	800 psig
MARKING	MSS SP-110
FIRE SAFE	API 607 / BS 6755
END DESIGN NPT/BSP	ANSI B1.20.1 / ISO-228/1

GATE VALVE RF (Fig. 322) - B62	
DESIGN STANDARDS	BS 5154
WORKING PRESSURE	ANSI 150/300
FACE TO FACE	ASME B16.10
MARKING	MSS SP-80
END DESIGN	ANSI B16.5

GLOBE VALVE THREADED (Fig. 352/353)	
DESIGN STANDARDS	BS 5154
WORKING PRESSURE	S.200 / S.300
MARKING	MSS SP-80
END DESIGN NPT/BSP	ANSI B1.20.1 / ISO-228/1

GATE VALVE THREADED (Fig. 317)	
DESIGN STANDARDS	BS 5154
WORKING PRESSURE	S.200
MARKING	MSS SP-80
END DESIGN NPT/BSP	ANSI B1.20.1 / ISO-228/1

CHECK VALVE BSP (Fig. 372)	
DESIGN STANDARDS	BS 5154
WORKING PRESSURE	S.100
MARKING	MSS SP-80
END DESIGN BSP	ISO-228/1

GATE VALVE - FLANGED ENDS

3" a 24" - ANSI Class: 150 / 300 / 600



FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
RISING STEM & HANDWHEEL	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 600 / NACE MR 0175
FACE TO FACE	ANSI B16.10
FLANGE FACE	ANSI B16.5
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

GLOBE VALVE - FLANGED ENDS

3" a 24" - ANSI Class: 150 / 300 / 600



FEATURES & STANDARDS	
OUTSIDE SCREW & YOKE OS&Y	
BOLTED BONNET	
RISING STEM & HANDWHEEL	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 600 / NACE MR 0175
FACE TO FACE	ANSI B16.10
FLANGE FACE	ANSI B16.5
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

SWING CHECK VALVE - FLANGED ENDS

3" a 16" - ANSI Class: 150 / 300 / 600



FEATURES & STANDARDS	
HORIZONTAL OR VERTICAL INSTALLATION	
DESIGN STANDARDS	API 600 / NACE MR 0175
FACE TO FACE	ANSI B16.10
FLANGE FACE	ANSI B16.5
P-T RATING	ANSI B16.34
PRESSURE TEST	API 598

DEI

VALVES STOCKIST

D.E.I. S.r.l.
Via Alessandria, 10015, Ivrea (TO)



Tel: +34 93 171 31 01
lexier@lexier.es
www.lexier.es

